


Matalat mutterin DIN 439 (ISO 8675)

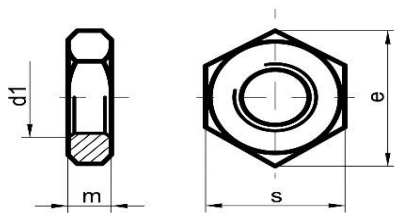

Mitat

d1	M4	M5	M6	M8	M10	M12
e min.	7,66	8,79	11,05	14,38	18,9	21,1
s	7,0	8,0	10,0	13,0	17,0	19,0
m max.	2,2	2,7	3,2	4,0	5,0	6,0

KINEX

Likimääräinen paino kg/1000 kpl

	0,57	0,83	1,6	3,2	7,2	10,4
--	------	------	-----	-----	-----	------

Mitat

d1	M16	M20	M24	M30	M36	M42
e min.	26,75	32,95	39,55	50,85	60,79	71,3
s	24,0	30,0	36,0	46,0	55,0	65,0
m max.	8,0	10,0	12,0	15,0	18,0	21,0

Likimääräinen paino kg/1000 kpl

	20,5	40,2	69,5	139	244	403
--	------	------	------	-----	-----	-----