


## Lukkoruuvit DIN 603 (ISO 8678)

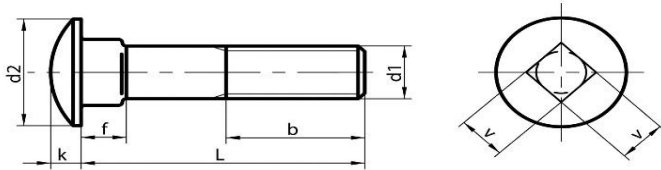

### Mitat

d1	M5	M6	M8	M10	M12	M16	M20
d2 max.	13,6	16,6	20,7	24,7	30,7	38,8	46,8
k max.	3,3	3,9	4,9	5,4	7,0	9,0	11,1
f max.	4,1	4,6	5,6	6,6	8,8	12,9	15,9
v max.	5,5	6,5	8,6	10,6	12,7	16,7	20,8
Nousu	0,8	1,0	1,3	1,5	1,8	2,0	2,5

### Likimääräinen paino kg/1000 kpl

**KINEX**

Pituus L/mm	M5	M6	M8	M10	M12	M16	M20
16	4,0	6,9					
20	4,5	7,6	13,8				
25	5,1	8,5	15,4				
30	5,9	9,6	17,0	28,0	46,0		
35	6,7	10,7	19,0	30,0	49,0		
40	7,5	11,8	21,0	33,0	53,0		
45	8,3	12,9	23,0	36,0	57,0		
50	9,1	14,0	25,0	39,0	61,0	119	
55	9,9	15,1	27,0	42,0	66,0	126	
60	10,7	16,2	29,0	45,0	70,0	133	
65	11,5	17,3	31,0	48,0	74,0	141	
70	12,3	18,4	33,0	51,0	79,0	149	247
80	13,9	21,0	37,0	58,0	87,0	165	272
90		23,0	41,0	64,0	96,0	181	297
100		25,0	45,0	70,0	105	197	322
110		27,0	49,0	76,0	114	213	347
120		29,0	53,0	82,0	123	229	372
130		32,0	57,0	89,0	132	245	397
140		33,0	61,0	95,0	141	261	422
150		35,0	65,0	101	150	277	447
160				107	159	293	497
180				119	177	325	547
200				131	195	357	597