


# Pidätinruuvit DIN 913 (ISO 4026)



## Mitat

| d1     | M3  | M4  | M5  | M6  | M8  | M10 | M12 | M16  |
|--------|-----|-----|-----|-----|-----|-----|-----|------|
| s      | 1,5 | 2,0 | 2,5 | 3,0 | 4,0 | 5,0 | 6,0 | 8,0  |
| tol.   |     | D9  |     | D10 |     | E10 |     | E11  |
| t min. | 2,0 | 2,5 | 3,0 | 3,5 | 5,0 | 6,0 | 8,0 | 10,0 |

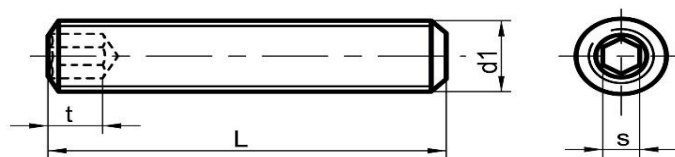

## Likimääräinen paino kg/1000 kpl

| Pituus<br>L/mm | M3   | M4   | M5   | M6   | M8   | M10  | M12  | M16  |
|----------------|------|------|------|------|------|------|------|------|
| 3              | 0,1  |      |      |      |      |      |      |      |
| 4              | 0,14 |      |      |      |      |      |      |      |
| 5              | 0,18 | 0,3  |      |      |      |      |      |      |
| 6              | 0,22 | 0,38 | 0,56 | 0,76 |      |      |      |      |
| 8              | 0,31 | 0,53 | 0,8  | 1,11 | 1,89 |      |      |      |
| 10             | 0,4  | 0,68 | 1,04 | 1,46 | 2,52 | 3,78 |      |      |
| 12             | 0,49 | 0,83 | 1,28 | 1,81 | 3,15 | 4,78 |      |      |
| 16             | 0,67 | 1,13 | 1,76 | 2,51 | 4,41 | 6,78 | 9,6  |      |
| 20             | 0,85 | 1,43 | 2,24 | 3,21 | 5,67 | 8,76 | 12,4 | 21,5 |
| 25             |      |      | 2,84 | 4,09 | 7,26 | 11,2 | 16,0 | 28,0 |
| 30             |      |      |      | 4,97 | 8,85 | 13,7 | 19,6 | 34,6 |
| 35             |      |      |      | 5,85 | 10,4 | 16,2 | 23,2 | 41,1 |
| 40             |      |      |      |      | 12,0 | 18,7 | 26,8 | 47,7 |
| 45             |      |      |      |      |      |      |      |      |
| 50             |      |      |      |      |      |      |      |      |
| 55             |      |      |      |      |      |      |      |      |
| 60             |      |      |      |      |      |      |      |      |

## Pidätinruuvit DIN 913 (ISO 4026)

### Mitat

| d1     | M20  | M24  |
|--------|------|------|
| s      | 10,0 | 12,0 |
| tol.   |      |      |
| t min. | 12,0 | 15,0 |

### Likimääräinen paino kg/1000 kpl

| Pituus<br>L/mm | M20  | M24  |
|----------------|------|------|
| 20             | 32,3 |      |
| 25             | 42,6 | 57,0 |
| 30             | 52,9 | 72,0 |
| 35             | 63,2 | 87,0 |
| 40             | 73,5 | 102  |
| 45             | 83,8 | 117  |
| 50             | 94,1 | 132  |
| 55             |      | 147  |
| 60             |      | 162  |