




## Kuusiokoloruuvit DIN 912 (ISO 4762)

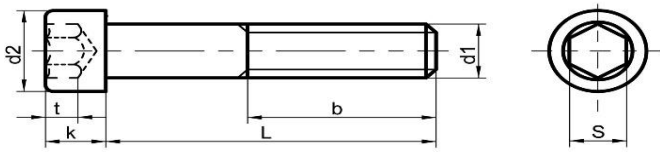


### Mitat

d1	M14	M16
d2	21,0	24,0
s	12,0	14,0
t min.	7,0	8,0
k	14,0	16,0
Nousu	2,0	2,0
b	40,0	44,0

### Likimääräinen paino kg/1000 kpl

Pituus L/mm	M14	M16
5		
6		
8		
10		
12		
16		
20		
25	48,0	71,0
30	53,0	78,0
35	58,0	84,0
40	63,0	91,0
45	68,0	98,0
50	73,0	106
55	78,0	114
60	84,0	122
65	90,0	130
70	96,0	138
75	102	146
80	108	154
90	120	170
100	132	186
110	144	202
120	156	218
130	168	234
140	180	250
150	192	266
160	204	282
180	228	314
200	252	346

## Kuusiokoloruuvit DIN 912 (ISO 4762)

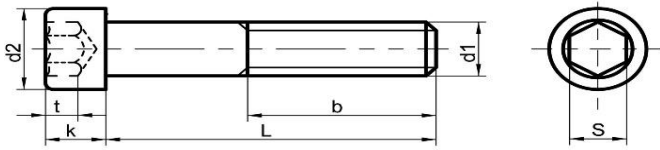

### Mitat

d1	M18	M20	M22	M24	M27	M30	M33	M36
d2	27,0	30,0	33,0	36,0	40,0	45,0	50,0	54,0
s	14,0	17,0	17,0	19,0	19,0	22,0	24,0	27,0
t min.	9,0	10,0	11,0	12,0	13,5	15,5	18,0	19,0
k	18,0	20,0	22,0	24,0	27,0	30,0	33,0	36,0
Nousu	2,5	2,5	2,5	3,0	3,0	3,5	3,5	4,0
b	48,0	52,0	56,0	60,0	66,0	72,0	78,0	84,0

### Likimääräinen paino kg/1000 kpl



Pituus L/mm	M18	M20	M22	M24	M27	M30	M33	M36
30	111	129						
35	120	139	221					
40	129	150	224	270				
45	138	161	237	285	330	500		
50	147	172	250	300	352	527	630	
55	156	183	263	316	374	554	665	870
60	165	194	276	330	396	581	700	910
65	174	205	291	345	418	608	735	950
70	183	216	306	363	440	635	770	990
75	193	229	321	381	462	663	800	1030
80	203	241	336	399	484	690	830	1070
90	223	269	366	435	529	745	900	1150
100	243	291	396	471	574	800	970	1230
110	263	316	426	507	619	855	1040	1310
120	283	341	456	543	664	910	1110	1390
130	303	366	486	579	709	965	1180	1470
140	323	391	516	615	754	1020	1250	1550
150	343	416	546	651	799	1080	1320	1630
160	363	441	576	687	844	1130	1390	1710
180	403	491	636	759	934	1240	1530	1870
200	443	541	696	831	1020	1350	1670	2030
220		591	756	903	1110	1460	1810	2190
240		641		975	1230	1570	1950	2250
260		691		1047	1340	1680	2040	2410
280		741		1119		1790	2180	2570
300		791		1191		1900	2320	2730